


MN EN 733 ~ 2900 r.p.m.

65-250

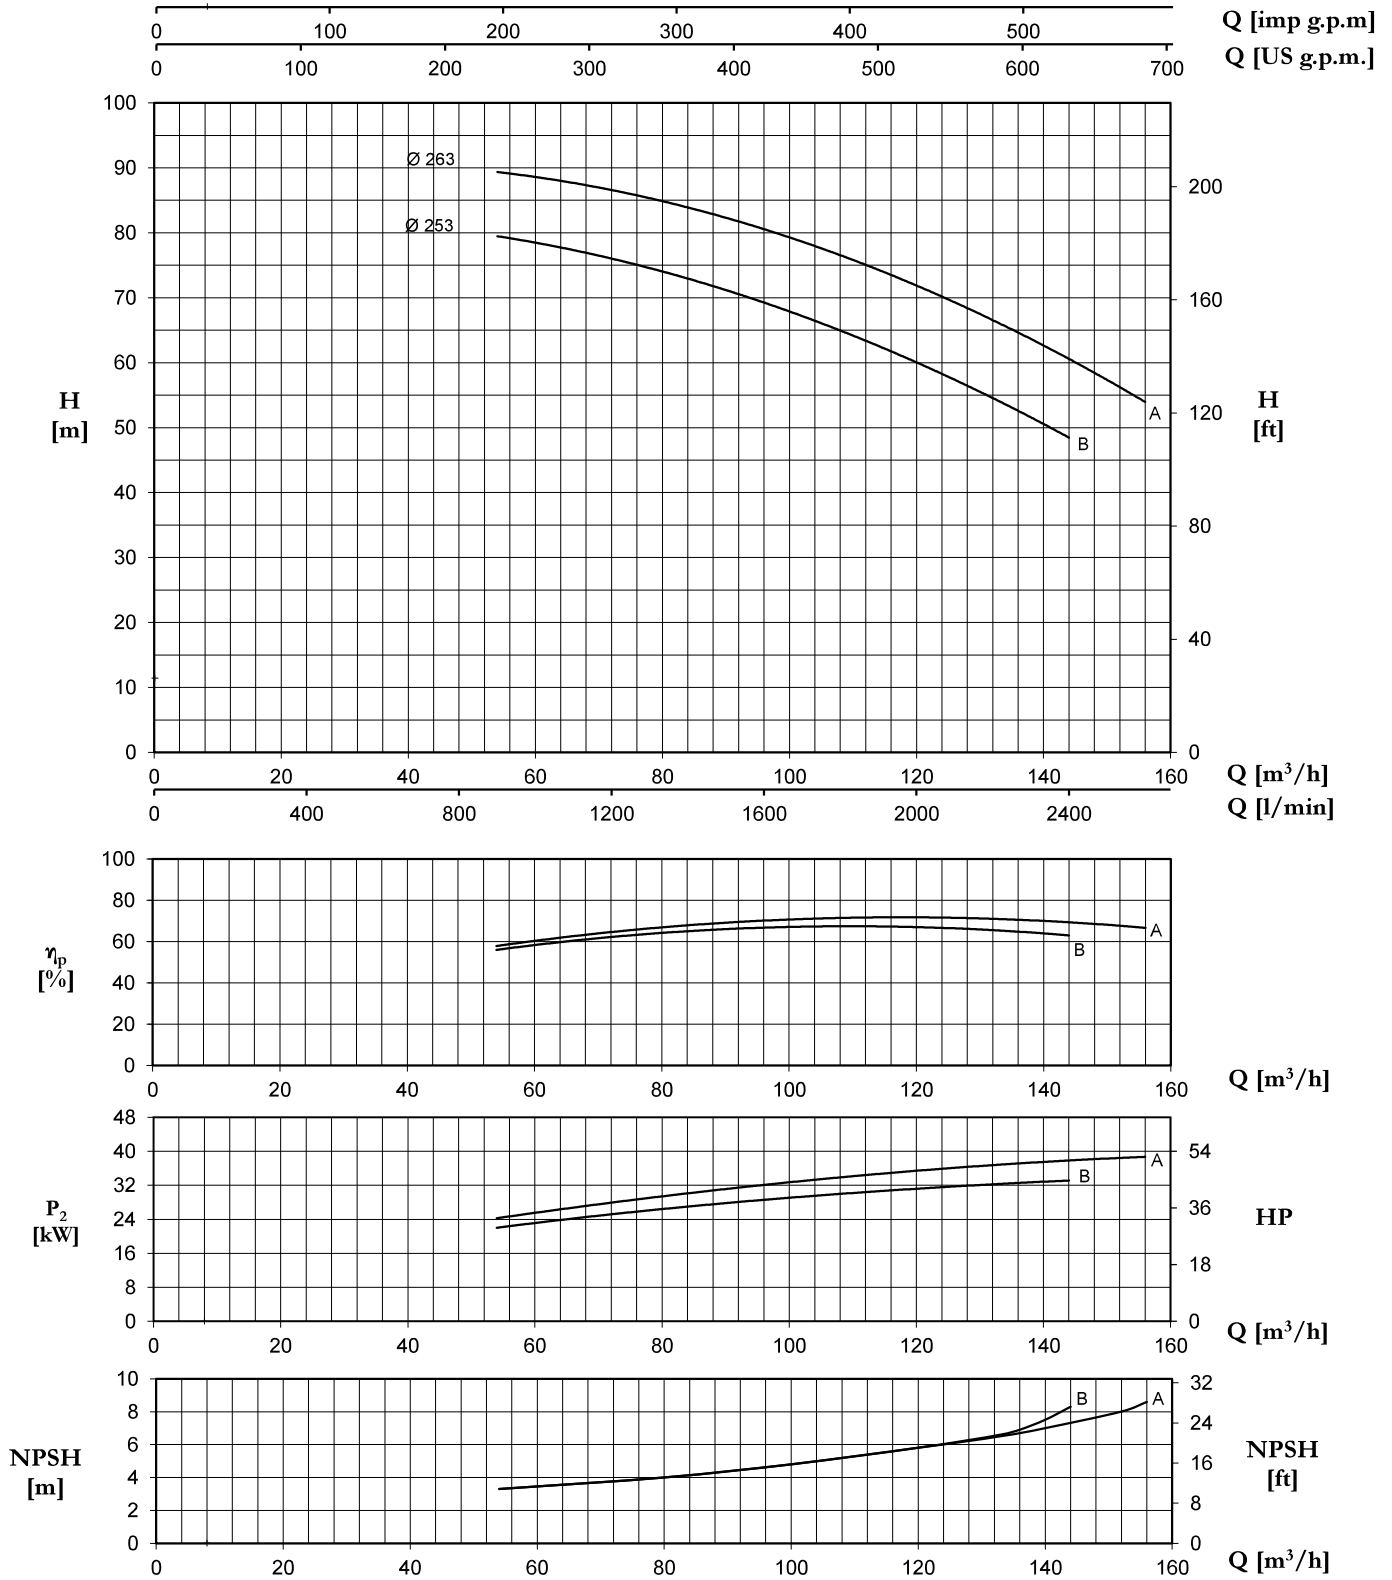

Tolerance: ISO 9906:2012 - Grade 3B

TYPE	P ₂		P ₁ (kW)	A															
				3~	Q (m³/h - l/min)														
					0	54	60	66	72	78	84	96	108	120	132	144	156		
3~	(HP)	(kW)	3~	3x400 V 50 Hz	H (m)														
65-250 B	40	30	37,8	63,5	81,0	79,5	78,5	77,3	76,0	74,5	73,0	69,3	65,0	60,0	54,5	48,5	-		
65-250 A	50	37	45	74,5	90,0	89,5	88,5	87,5	86,5	85,5	84,0	80,5	76,5	72,0	66,5	60,5	54,0		