


**4CA/4CAT - 4CAX EN 733 ~ 1450 r.p.m.**

**100-400**

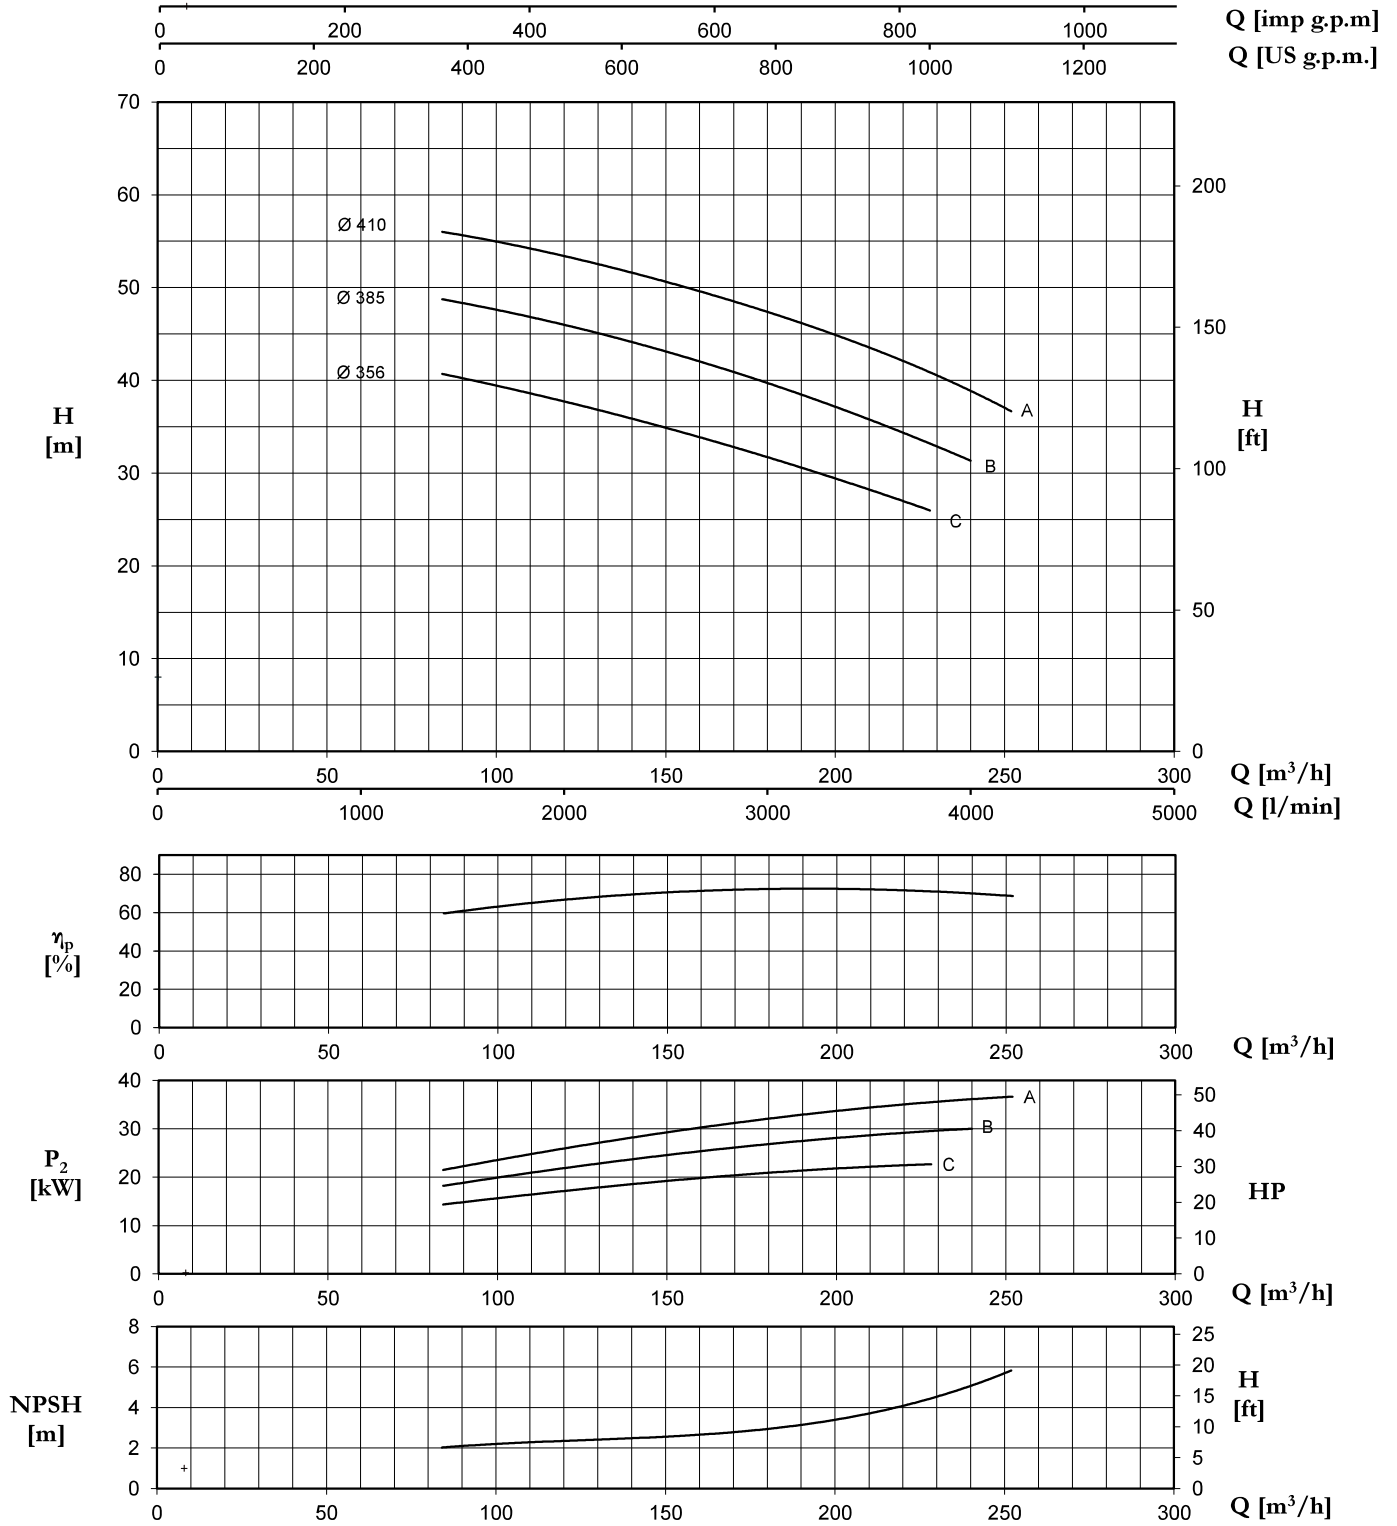

Tolerance: ISO 9906:2012 - Grade 3B

TYPE	Nominal Power (kW)	Motor Size	Q (m³/h - l/min)										
			0	84	108	132	156	180	204	216	228	240	252
			0	1400	1800	2200	2600	3000	3400	3600	3800	4000	4200
H (m) / pump input power (kW)													
100-400C	22	180L	42,4	40,6	38,8	36,7	34,3	31,4	29,1	27,7	25,8		
			6,93	14,36	16,27	17,98	19,64	20,95	21,91	22,31	22,70		
100-400B	30	200L	50,3	48,7	47,0	44,9	42,6	39,8	36,5	34,7	33,1	31,6	
			9,32	18,20	20,75	23,04	25,03	26,80	28,36	29,01	29,56	30,00	
100-400A	37	225S	58,3	56,0	54,3	52,4	50,1	47,3	44,3	42,7	40,9	38,8	36,7
			11,46	21,50	24,54	27,31	29,89	32,15	34,00	34,77	35,48	36,11	36,69