


4CA/4CAT - 4CAX EN 733 ~ 1450 r.p.m.

80-200

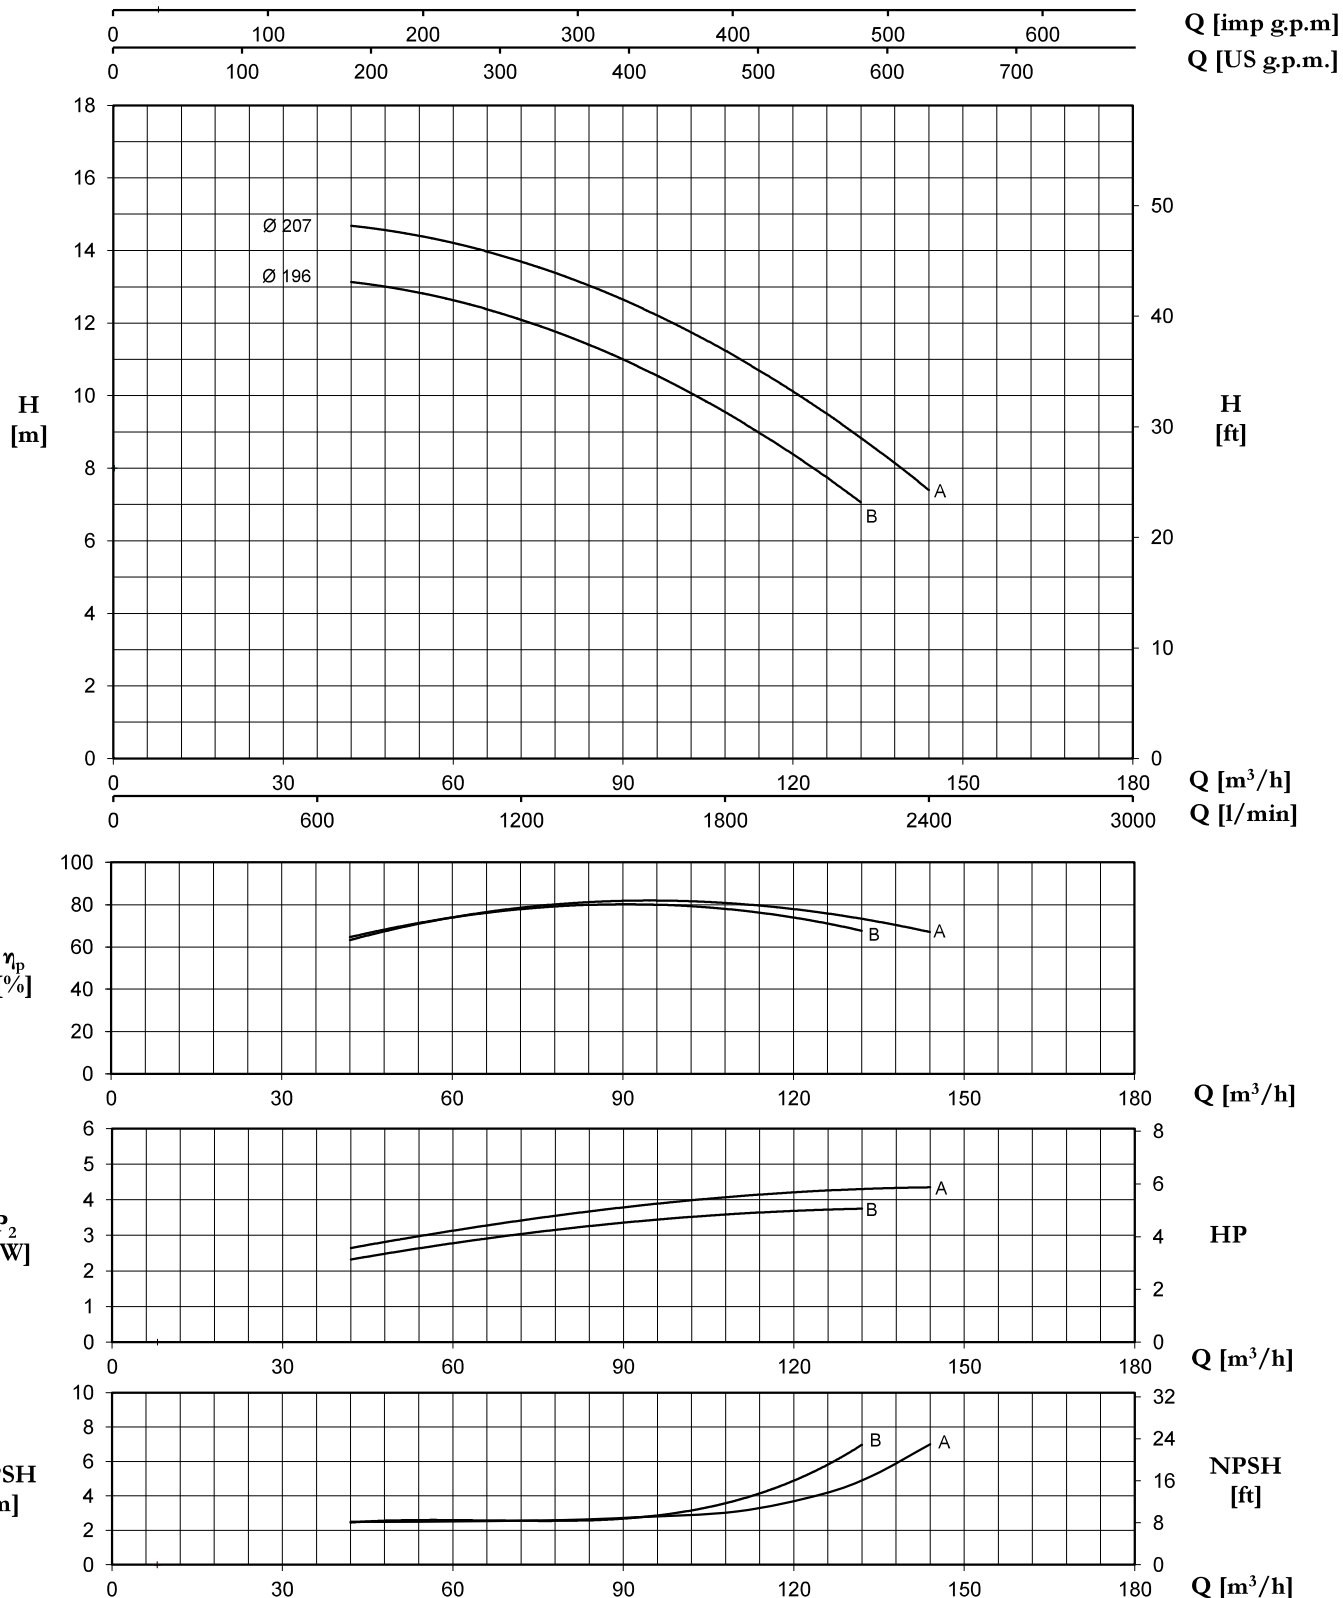

Tolerance: ISO 9906:2012 - Grade 3B

TYPE	Nominal Power (kW)	Motor Size	Q (m³/h - l/min)											
			0	42	60	84	96	102	108	120	132	144		
			0	700	1000	1400	1600	1700	1800	2000	2200	2400		
H (m) / pump input power (kW)														
80-200B	4	112M	12,3	13,1	12,6	11,4	10,5	10,1	9,6	8,4	7,1			
			1,25	2,32	2,79	3,26	3,45	3,52	3,58	3,69	3,75			
80-200A	5,5	132S	13,8	14,7	14,2	13,1	12,3	11,7	11,2	10,1	8,8	7,5		
			1,40	2,64	3,14	3,66	3,87	3,99	4,09	4,21	4,30	4,35		