


CA/CAT - CAX EN 733 ~ 2900 r.p.m.

40-250

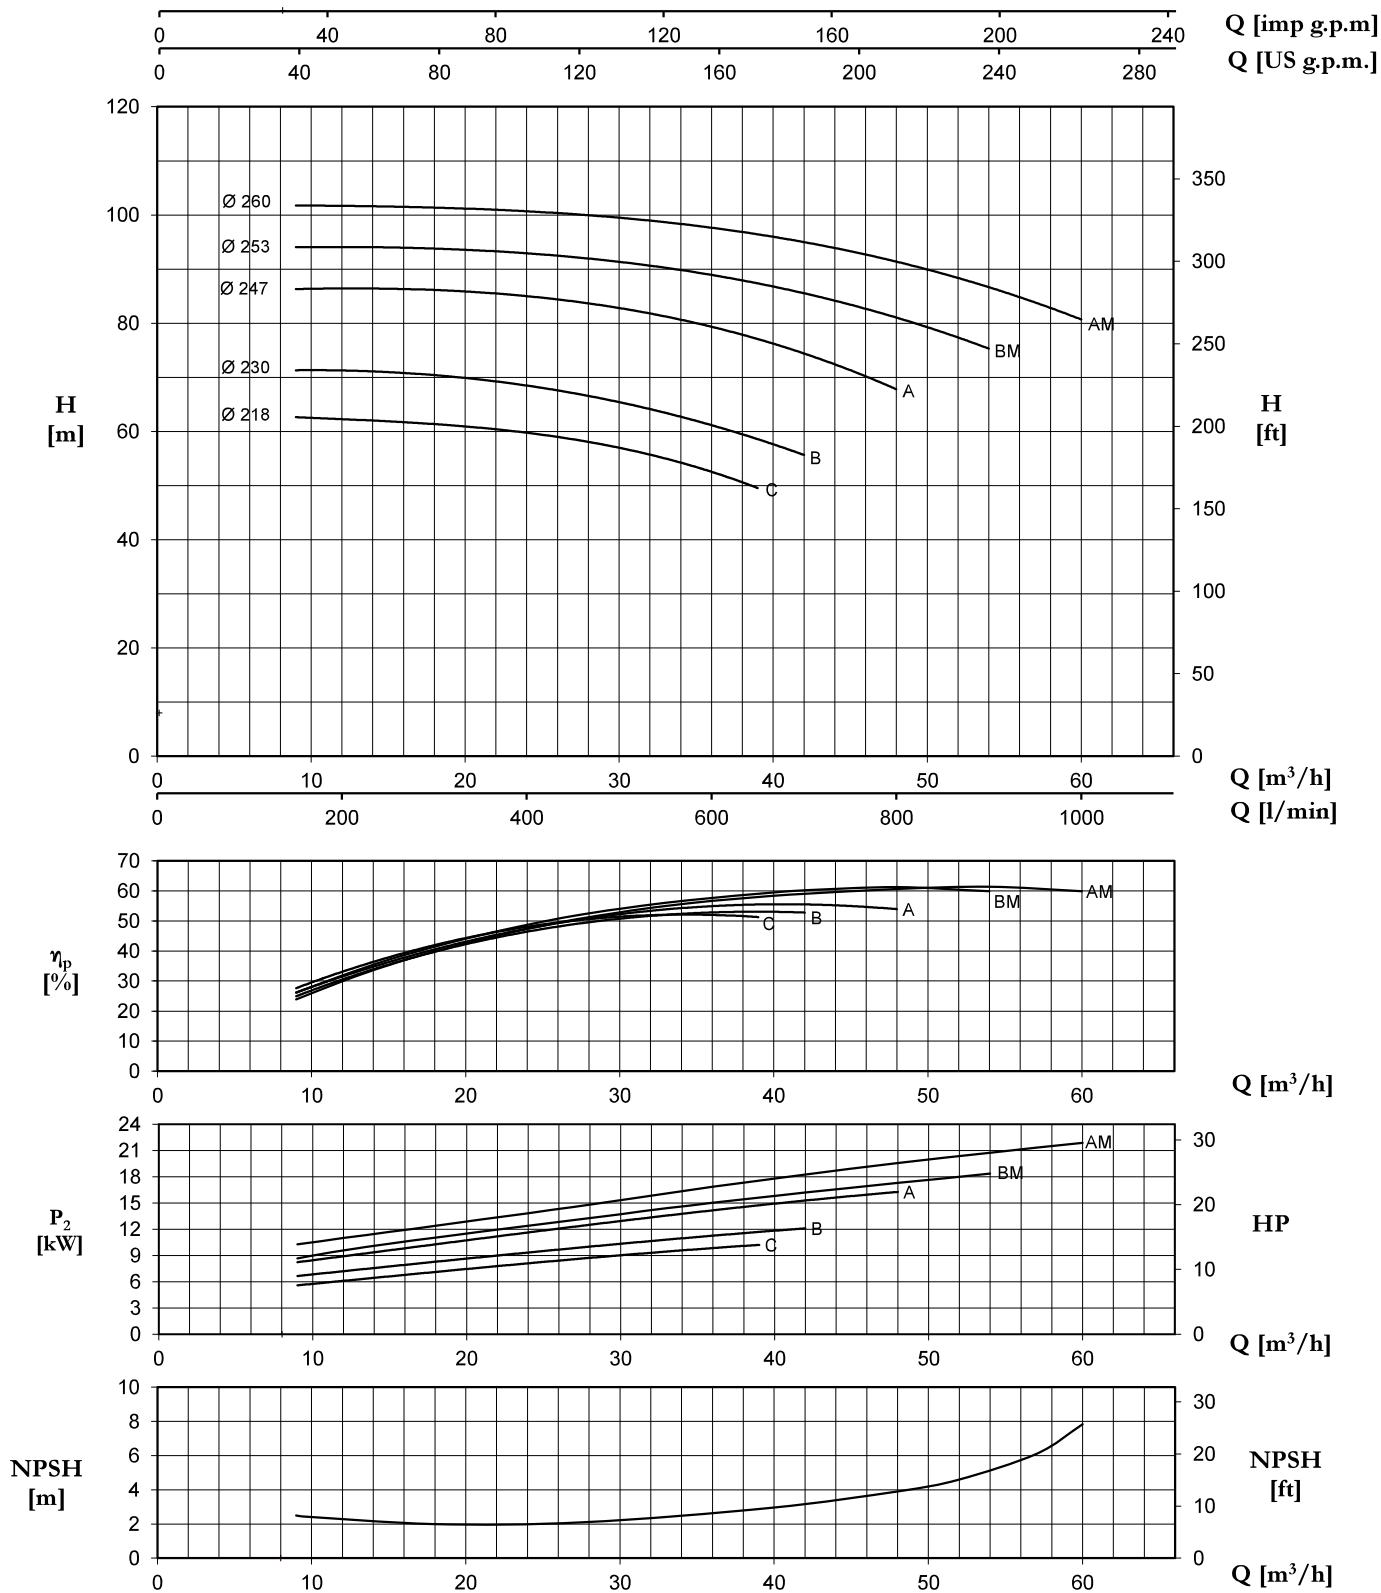

Tolerance: ISO 9906:2012 - Grade 3B

TYPE	Nominal Power (kW)	Motor Size	Q (m³/h - l/min)											
			0	9	15	21	27	36	39	42	48	54	60	
			0	150	250	350	450	600	650	700	800	900	1000	
H (m) / pump input power (kW)														
40-250C	11	160M	63,0	62,6	61,9	60,5	58,6	52,4	49,6					
			4,40	5,60	6,61	7,63	8,57	9,83	10,22					
40-250B	11	160M	70,8	71,3	71,0	69,8	66,6	61,2	58,5	55,6				
	15	160M	5,16	6,65	7,76	8,80	9,86	11,25	11,89	12,11				
40-250A	15	160M	86,1	86,3	86,4	85,6	84,1	79,4	77,0	74,3	67,9			
	18,5	160L	6,70	8,24	9,58	10,97	12,31	14,13	14,74	15,32	16,27			
40-250BM*	18,5	160L	93,1	93,8	94,2	93,4	92,2	88,8	87,3	85,6	81,4	75,1		
			6,81	8,68	10,35	11,73	13,06	15,03	15,63	16,20	17,29	18,37		
40-250AM*	22	180M	101,6	101,9	101,4	101,0	100,3	97,8	96,3	94,6	91,2	87,0	80,6	
			8,99	10,26	11,69	13,13	14,57	16,85	17,56	18,26	19,57	20,75	21,89	

(*) : max 14 bar