


# 80-200

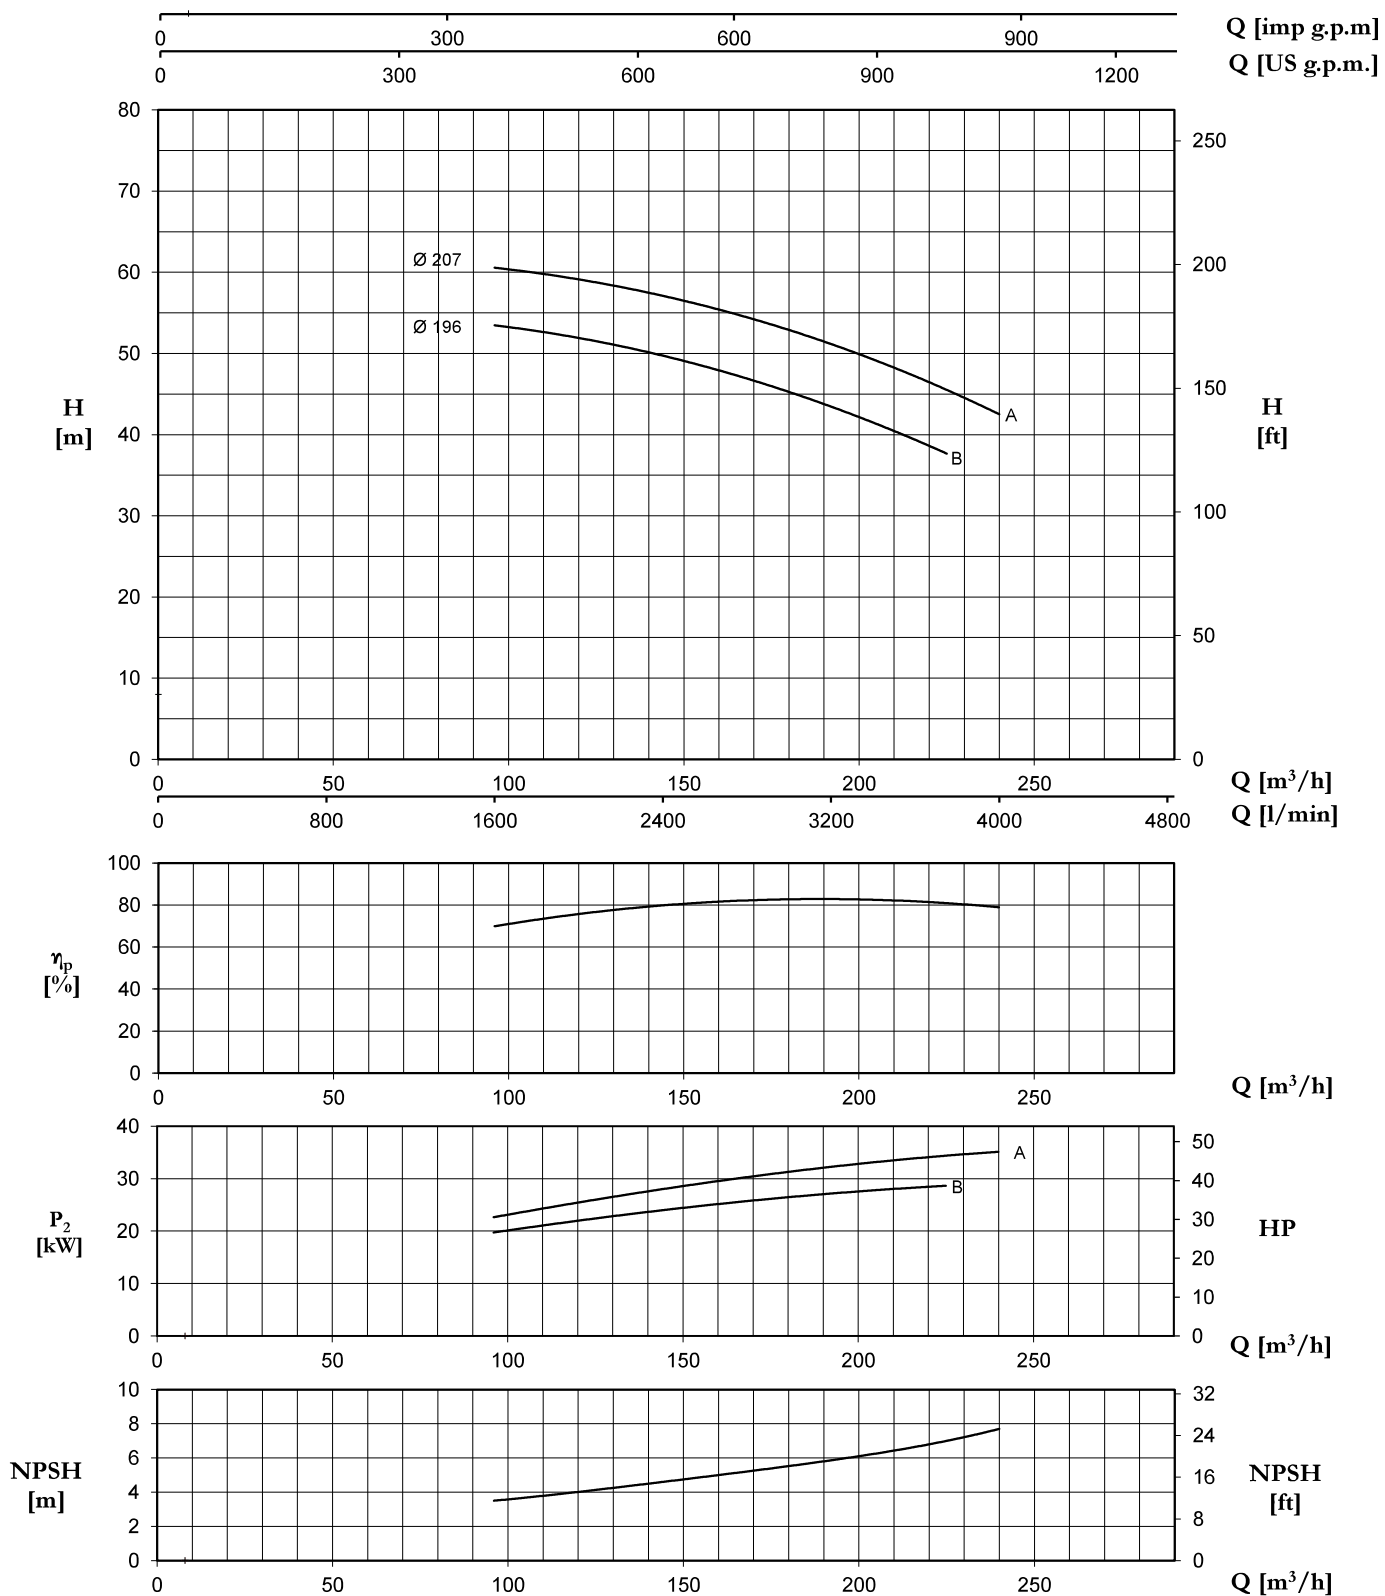

Tolerance: ISO 9906:2012 - Grade 3B

TYPE	P2		P1 (kW)	A	Q (m³/h - l/min)										
				3~	0	96	120	132	156	168	180	210	225	240	
				3x400 V 50 Hz	0	1600	2000	2200	2600	2800	3000	3500	3750	4000	
3~	(HP)	(kW)	3~	H (m)											
<b>80-200 B</b>	40	30	33,8	56,5	50,1	53,5	51,8	50,9	48,5	46,9	45,2	40,4	37,7	-	
<b>80-200 A</b>	50	37	40,5	67,0	56,7	60,6	59,1	58,1	56,0	54,4	52,7	48,3	45,6	42,4	